

**M12 MALE 0° FIELD-WIREABLE**

Male straight

M12, 4-pole

Screw terminals



Sealing range (cable Ø): 8...10 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

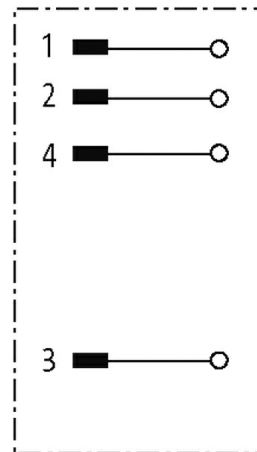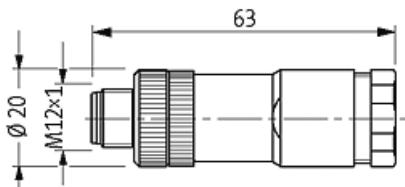

Product may differ from Image

**Form**

Form 12745

**Technical Data**

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 8 A
Connection cross section	max. 1.5 mm <sup>2</sup>
Sealing range (cable Ø)	8...10 mm
Protection	IP67 inserted and tightened (EN 60529)

**General data**

Temperature range -25...+85 °C

**Commercial data**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

country of origin	DE
customs tariff number	85366990
EAN	4048879378376
eClass	27279221
Packaging unit	1