

MOSA M12 FEMALE 0° FIELD-WIREABLE (IDC)A-cod., 4-pol., 0,14-0,34mm², shielded

Female straight


M12, 4-pole

IDC terminals


Connection cross section: 0.14...0.34 mm²

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

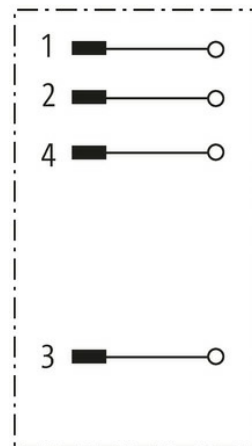[Link to Product](#)**Illustration**

Female

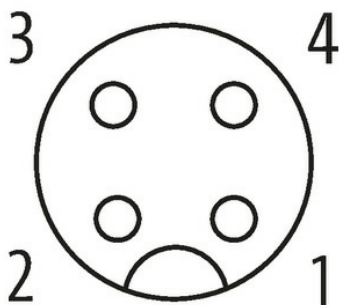

Product may differ from Image

**Form**

Form 12651

Technical Data

Operating voltage max. 50 V AC/DC

Operating current per contact max. 4 A

Connection cross section	0.14...0.34 mm ² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	4.5...8.8 mm
Protection	IP67 inserted and tightened (EN 60529)
Outer wire Ø	1.2...1.6 mm

General data

Temperature range	-25...+85 °C
Dimensions H×W×D	49×19.5×19.5 mm

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879306034
eClass	27279221
Packaging unit	1.000