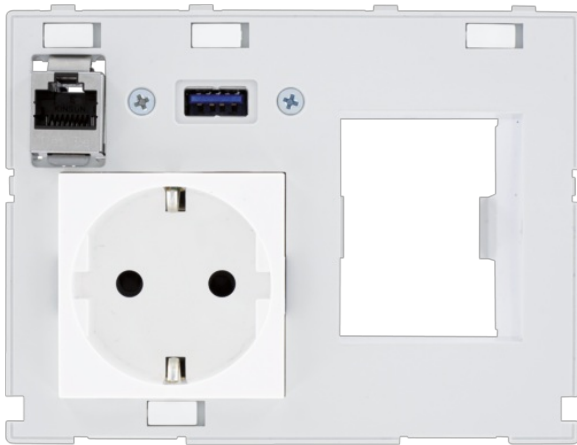


**MODLINK MSDD DBL COMBI INSERT GERMANY**

1xRJ45+USB-A + RCD opening

1 × Germany (VDE) white  
 1 × USB 3.0 (female/female) form A  
 1 × RJ45, 8-pole metal, CAT5e (female/female)  
 1 × FI cut-out

**Link to Product****Illustration**

Product may differ from Image

**General data**

Dimensions HxWxD	88x116x70 mm
------------------	--------------

**RJ45**

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

**USB**

Operating current	1.5 A
Specification	USB: 3.0 (max. 5 Gbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC

**Germany (VDE)**

Connection	Spring clamp terminals: max. 2x 2.5 mm <sup>2</sup> (AWG 14)
Operating voltage	250 V AC
No. of poles	2 + PE
Operating current	16 A

**Commercial data**

country of origin	CZ
customs tariff number	85366990
EAN	4048879401869
eClass	27189217

Packaging unit

1.000