
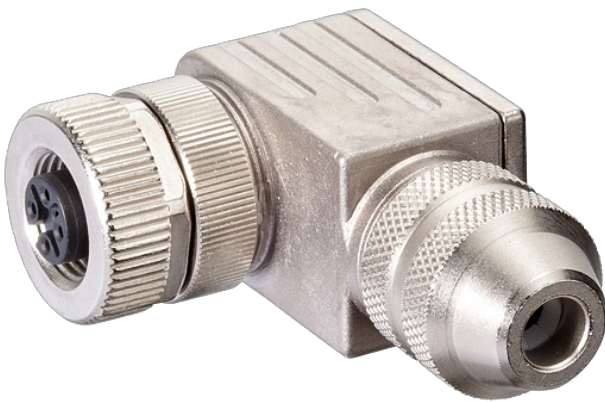
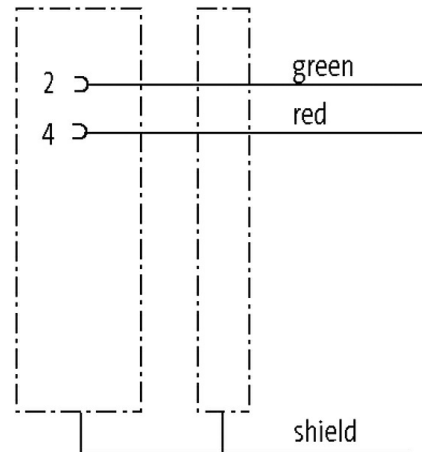
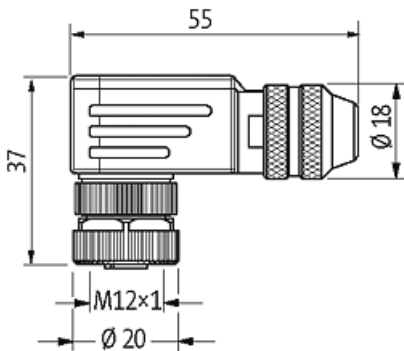


M12 FEMALE 90° B CODED SHIELD WIREABLE SCREW TERM.2 POLE max. 0.75mm² 6-8mm PROFIBUS

PROFIBUS
 Female 90°
 M12, 2-pole
 B-coded
 shielded
 Screw terminals
 Sealing range (cable Ø): 6...8 mm

[Link to Product](#)**Illustration**

Female

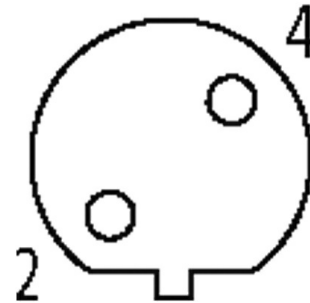

Product may differ from Image

Form

Form 14035

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879419147
eClass	27279221
Packaging unit	1