

## T COUPLER M12 MALE / M8 FEMALE 0° LITE

T-coupler

Male straight – females straight

M12, 4-pole – M8, 3-pole

Distribution function (NO)




7005 - plastic hexagonal screw (M12/M8 Lite)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### Link to Product

#### Illustration

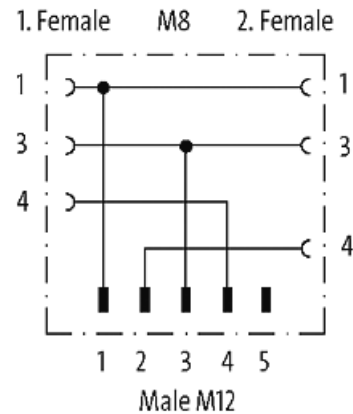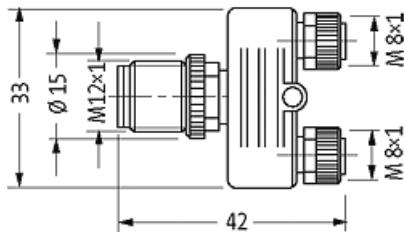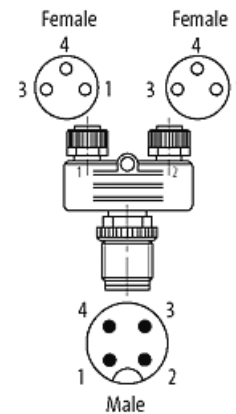

Product may differ from Image



#### Form

Form 41201

#### Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I

Coding	A-coded
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Compression gland	M8 (SW9), M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	PA
Material	PUR
<b>General data</b>	
Pollution Degree	3
Temperature range	-25...+85 °C
Material (gasket)	FKM
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85366990
EAN	4048879413947
eClass	27279218
Packaging unit	1