

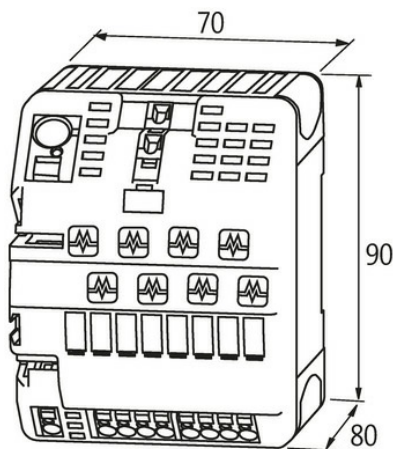
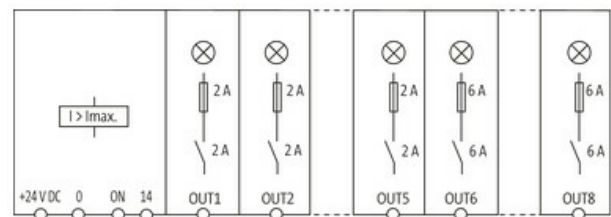
MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT, 8 CHANNELS

IN: 24VDC OUT: 5x24V/2ADC 3x24V/6ADC

MICO BASIC 5.2/3.6

8 channels

Current adjustment 5 × 2 A; 3 × 6 A

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)
Connection	Spring clamp terminals
Dimensions H×W×D	90×70×80 mm
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Output terminals	per output 1 × 4 mm ²
Input terminals	1 × 16 mm ²

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Alarm terminals	2.5 mm ²
-----------------	---------------------

Output

Inrush capacity	max. 20 mF (per channel)
-----------------	--------------------------

Current adjustment	5× 2 A; 3× 6 A
--------------------	----------------

Input

Operating voltage	24 V DC (18...30 V DC)
-------------------	------------------------

Control inputs

Input voltage (ON)	10...30 V DC
--------------------	--------------

Impulse length (ON)	min. 20 ms
---------------------	------------

Control outputs

Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
--------------------	---

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85363030
-----------------------	----------

EAN	4048879382373
-----	---------------

eClass	27371802
--------	----------

Packaging unit	1.000
----------------	-------