

M12-BUS TERMINATING PLUG FOR CUBE67 HD

Cube67

Terminating resistor

Male

M12, 6-pole

A-coded

Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.




The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration



Male

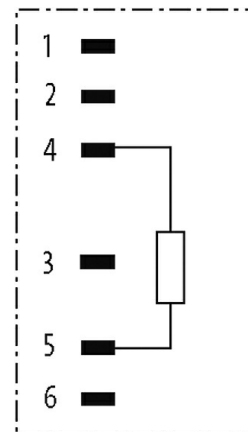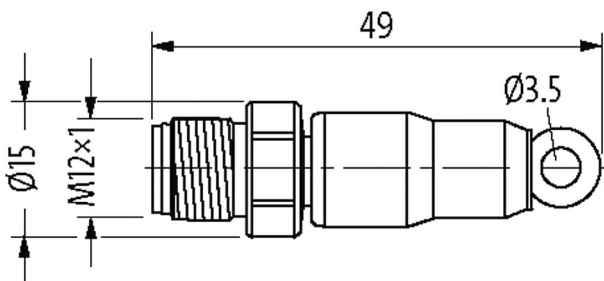

Product may differ from Image



Form

Form 15041

Technical Data

Operating voltage max. 30 V DC

Operating voltage (only UL listed) max. 30 V DC

Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A
No. of poles	6
Material group	IEC 60664-1, category I
Coding	A-coded
LED display	no
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12 (SW14)
Protection	IP67 inserted and tightened (EN 60529)
Material	PUR
Locking material	Stainless steel 1.4404 (V4A)

General data

Mounting method	inserted, tightened
Material (contact)	Copper alloy
Material (contact surface)	Au
Pollution Degree	3
Temperature range	-25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85332100
EAN	4048879706919
eClass	19070403
Packaging unit	1