

Reset button with 2 illuminated push buttons

Every 1 NO contact in a IP65 enclosure

R-Button / 42 2NO L M12(8)

with M12 connection

8-pole

2 buttons can be lit (each 1 NO contact)


Delivery contents:

Flat lens, transparent clear, red, yellow, green, blue


Label plates, O, I, R, ↑, ↓

Link to Product


Illustration

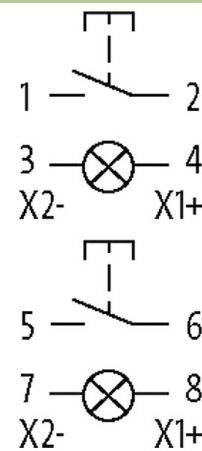

Male



| | |
|--------|--------|
| PIN 1: | N/C 1 |
| PIN 2: | N/C 1 |
| PIN 3: | (X2/-) |
| PIN 4: | (X1/+) |
| PIN 5: | N/C 2 |
| PIN 6: | N/C 2 |
| PIN 7: | (X2/-) |
| PIN 8: | (X1/+) |

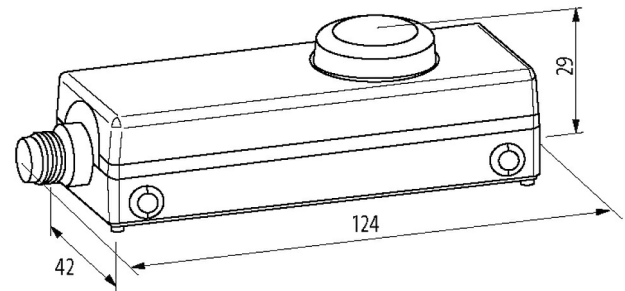

Product may differ from Image

Technical Data

| | |
|---------------------|--------------------------------------|
| Operating voltage | 1...36 V DC (UR: 30 V DC) |
| Operating current | 1.5 A |
| Contact bounce time | max. 10 ms |
| LED Light | max. 30 V AC/DC typ. 14 mA (24 V DC) |

General data

| | |
|--------------------|---|
| Mounting method | with clip on back |
| Material (contact) | Ag Ni |
| Temperature range | -25...+70 °C (storage temperature -25...+85 °C) |

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|--------------------|--|
| Mech./ elect. life | 1 000 000 operations, load-temperature dependent |
|--------------------|--|

| | |
|------------|------|
| Protection | IP65 |
|------------|------|

| | |
|------------|--------------|
| Connection | M12 (8-pole) |
|------------|--------------|

| | |
|------------------|--------------|
| Dimensions H×W×D | 29×124×42 mm |
|------------------|--------------|

Contact Layout

| | |
|-------|-------|
| PIN 1 | N/C 1 |
|-------|-------|

| | |
|-------|-------|
| PIN 2 | N/C 1 |
|-------|-------|

| | |
|-------|--------|
| PIN 3 | (X2/-) |
|-------|--------|

| | |
|-------|--------|
| PIN 4 | (X1/+) |
|-------|--------|

| | |
|-------|-------|
| PIN 5 | N/C 2 |
|-------|-------|

| | |
|-------|-------|
| PIN 6 | N/C 2 |
|-------|-------|

| | |
|-------|--------|
| PIN 7 | (X2/-) |
|-------|--------|

| | |
|-------|--------|
| PIN 8 | (X1/+) |
|-------|--------|

Commercial data

| | |
|-------------------|----|
| country of origin | DE |
|-------------------|----|

| | |
|-----------------------|----------|
| customs tariff number | 85365080 |
|-----------------------|----------|

| | |
|-----|---------------|
| EAN | 4048879594325 |
|-----|---------------|

| | |
|--------|----------|
| eClass | 27371228 |
|--------|----------|

| | |
|----------------|-------|
| Packaging unit | 1.000 |
|----------------|-------|