
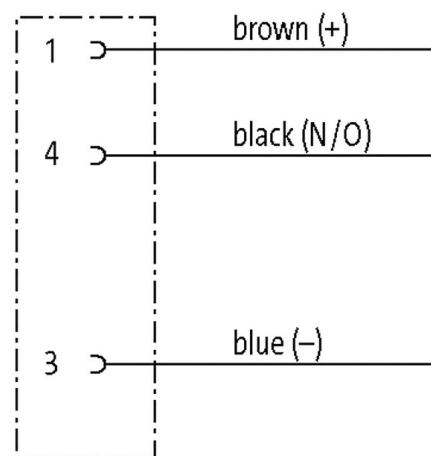
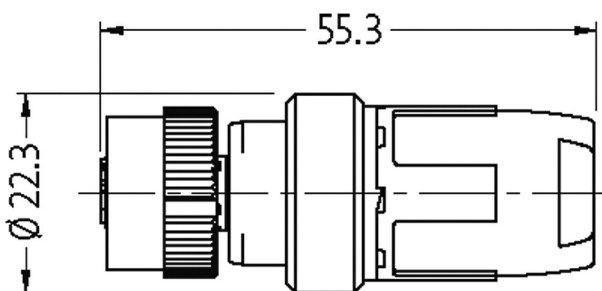


MOSA MQ12 FEMALE 0° FIELD-WIREABLE (IDC)3-pol. 0.5...1.0mm²

Female straight
MQ12, 3-pole
IDC terminals
Connection cross section: 0.5...1.0 mm²

[Link to Product](#)**Illustration**

Female



Product may differ from Image

Form

Form 12621

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.5...1.0 mm ² (conductor diameter min. 0.1 mm)
Outer wire Ø	1.6...2.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Sealing range (cable Ø)	5.5...8 mm
Wire isolation	PVC, PP, TPE

Commercial data

country of origin DE

customs tariff number	85366990
EAN	4048879106603
eClass	27279218
Packaging unit	1