

MODLINK MSDD DATA INSERT

2xUSB-A fem./fem. + 1xRJ45 + 1xSUB-D15 fem./male

SUB-D15 HD; RJ45; USB; USB (formA)


1 × SUB-D15 HD (female/male) VGA

1 × RJ45, 8-pole metal, CAT5e (female/female)

2 × USB (female/female) form A

Link to Product

Illustration

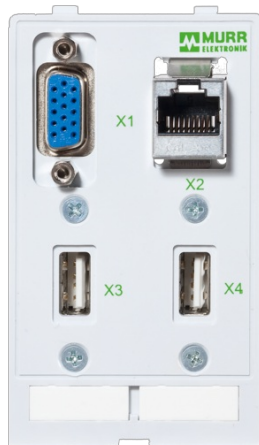

Product may differ from Image

General data

Dimensions H×W×D 88×51×45 mm

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

USB

Operating current	max. 500 mA
Specification	USB: 2.0 (max. 480 Mbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	42.4 V DC

Shielding plate

Tightening torque	0.9 Nm ±0.1
Connection	Threaded hole M4

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879037716
eClass	27189217
Packaging unit	1.000