

M12 MALE Y-DISTR. 0° WIREABLE SCREW TERM.4-pol. max.0,75mm²

Male straight

Y-connector M12, 4-pole

Screw terminals



Sealing range (cable Ø): 2.1...3/4...5 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

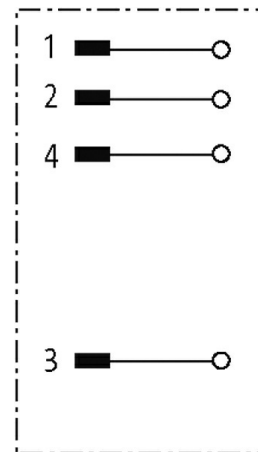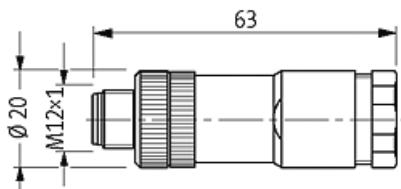

Product may differ from Image

Form

Form 12781

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	2.1...3/4...5 mm (2 cable entries)
Protection	IP67 inserted and tightened (EN 60529)

General data

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Temperature range	-40...+85 °C
-------------------	--------------

Dimensions H×W×D	63×20×20 mm
------------------	-------------

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879201629
-----	---------------

eClass	27279221
--------	----------

Packaging unit	1
----------------	---