

M12-PANEL FEED THROUGH 6POLE A CODED

Control cabinet entry system

Male - female



M12, 6-pole

A-coded


shielded

[Link to Product](#)



Illustration

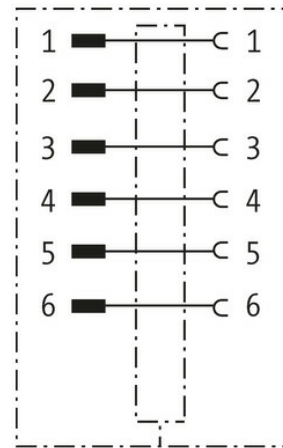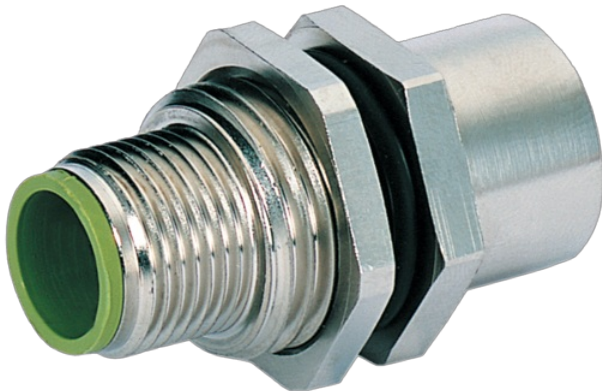

Male



Female

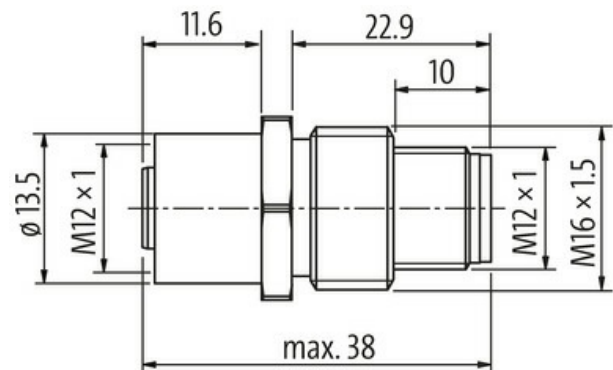

Product may differ from Image

Form

Form 46111

Technical Data

Operating voltage max. 30 V AC/DC

Rated surge voltage 0.8 kV

Operating current per contact max. 4 A

Material group IEC 60664-1, category I

Coding A-coded

Locking of ports Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing

Protection IP65 and IP67 when plugged and screwed down (EN 60529)

Material Brass, nickel plated

General data

Pollution Degree 3

Temperature range	-25...+85 °C
-------------------	--------------

Mounting set	M16×1.5 mm
--------------	------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879139892
-----	---------------

eClass	27279220
--------	----------

Packaging unit	1.000
----------------	-------