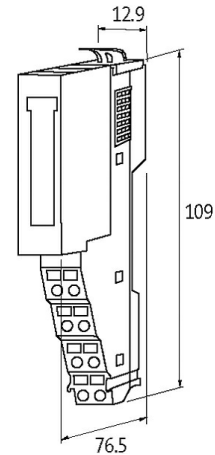


CUBE20S ANALOG INPUT MODULE AI2

2X16 Bit (U 0...10V)

Expansion module
AI2 - (E) U
Voltage

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+70 °C)
Protection	IP20
Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)
Dimensions H×W×D	109×12.9×76.5 mm

Input

Connection	Differential voltage input
Accuracy	max. ±0.2%
Conversion time (analog)	240 µs (all channels)
Resolution (analog)	15 Bit + sign

Internal communication

Current consumption	max. 60 mA from system, max. 25 mA externally (UI)
Module supply	via system connection

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module
Monitoring - under voltage	yes
Monitoring - no voltage	no
Wire break upper/lower limit overload	per module via LED and BUS
Short-circuit and overload	yes

Commercial data

country of origin	TH
customs tariff number	85389099
EAN	4048879423533
eClass	27242601
Packaging unit	1.000