


## MTS SINGLE-PHASE SAFETY TRANSFORMER

P:30VA IN:230VAC OUT:24VAC max. 26,3VAC

Single-phase - Control and Isolation Transformers  
30 VA  
Isolation class T 40/B  
Other voltages on request.

### [Link to Product](#)

#### Illustration

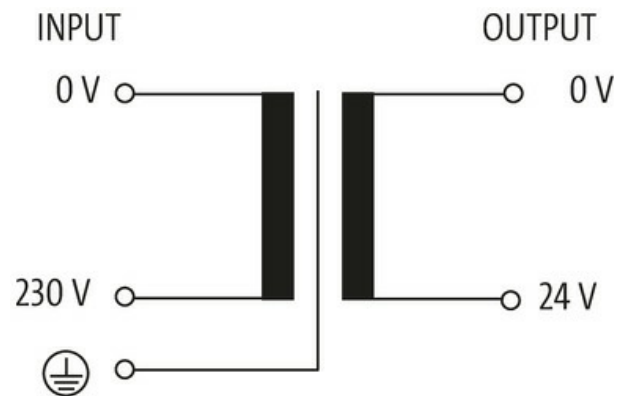

Product may differ from Image

#### General data

Standards	EN 61558-2-6, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	3.8 kV
Drill hole Ø	4.8×10 mm
Fixing centers a×b×c	56×56×4.8 mm
Dimensions H×W×D	92×79×93 mm

#### Output

Output voltage	24 V AC
Output rating	30 VA

Input	
Input voltage	230 V AC
Inrush current	1.52 A (230 V AC)
Short-circuit current	2.21 A (230 V AC)
Input current	0.22 A (230 V AC)
Frequency	50...60 Hz
Commercial data	
country of origin	CZ
customs tariff number	85043180
EAN	4048879320047
eClass	27031202
Packaging unit	1.000