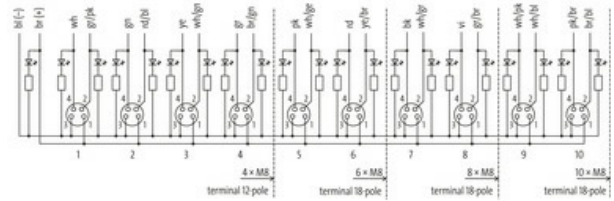


EXACT8, 4XM8, 4 POLE MOULDED CABLE



3.0m PUR/PVC 8x0,34+2x0,75

PUR/PVC


3.0 m

[Link to Product](#)**Illustration**

M8-Females 4-pole



for 2 signals per port

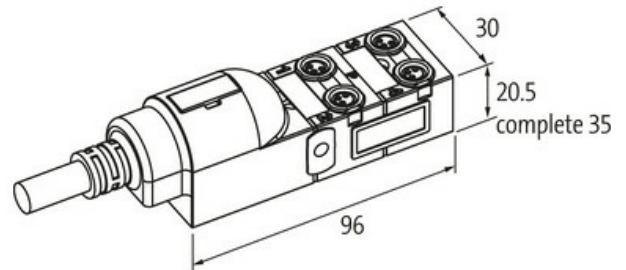

Product may differ from Image

**Form**

Form 84110

Technical Data

| | |
|-------------------------------|--------------------------|
| Operating voltage | 24 V DC |
| Operating current per contact | max. 2 A |
| Locking of ports | Screw thread (M8x1 mm) |
| Protection | IP65/IP67 |
| Housing | Plastic, flame retardant |
| Signal per port | 2 |
| Total current | max. 8 A |

General data

Temperature range -20...+80 °C, depending on cable quality

CablesNo./diameter of wires 8x 0.34 + 2x 0.75 mm²

| | |
|----------------------------|--------------|
| Wire isolation | PVC |
| C-track properties | 1.5 Mio. |
| Outer Ø | 8.6 mm ±5% |
| Cable number | 358 |
| Color (jacket) | gray |
| Jacket Color | gray |
| Temperature range (fixed) | -30...+70 °C |
| Temperature range (mobile) | -5...+60 °C |
| Bend radius (fixed) | 10× outer Ø |
| Bend radius (moving) | 12× outer Ø |
| Material (jacket) | PUR/PVC |

Contact Layout

| | |
|--|-----------|
| PIN 1 | (+) |
| PIN 2 | (NC)/(S2) |
| PIN 3 | (-) |
| PIN 4 | (NO)/(S1) |
| LED (green): Power / LED (yellow): (S1) / LED (white): Signal (S2) | |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85444290 |
| EAN | 4048879056274 |
| eClass | 27279219 |
| Packaging unit | 1.000 |