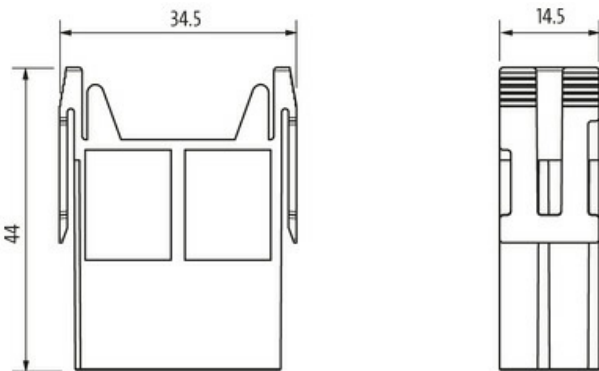
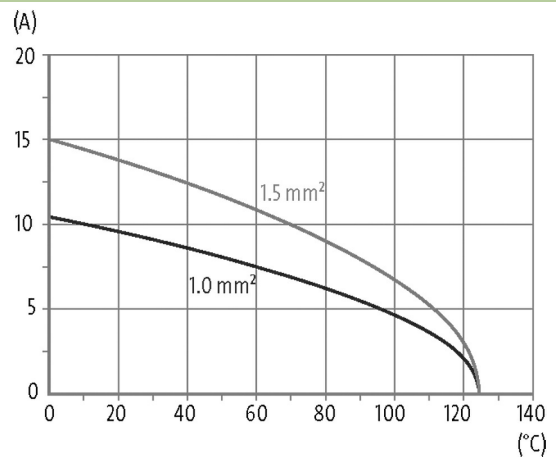


**Male module, 12-pole, crimp t.**

250 V (Pin-PE) / 400 V (Pin-Pin), 10 A

Male  
12-pole  
Crimp

Technical data will be only guaranteed with Murrelektronik components.

**[Link to Product](#)****Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	400 V AC/DC (PIN - PIN); 250 V AC/DC (PIN - PE)
Rated surge voltage	4.0 kV
Operating current	10 A
No. of poles	12
Material group	II
Mating cycles	min. 500
Connection	Crimp
Connection cross section	0.14...2.5 mm <sup>2</sup> (AWG 26...13)
Holding force (contacts)	≥ 70 N
Insertion and withdrawal force	< 60 N
Isolation resistance	≥ 10 <sup>8</sup> Ω
Contact resistance	≤ 5 mΩ
Over voltage category	III

Wire-Ø incl. isolation	max. 3.7 mm
Holding force (modules)	≥ 150 N

#### General data

Material (contact)	Brass
Material (contact surface)	Ag Au
Pollution Degree	3
Temperature range	-40...+125 °C
No. of module positions	1
Flammability class	V-0 (acc. to UL 94)
Type	Male
Climatic category	40/125/10
Material (module)	PA GF
Dimensions H×W×D	44×14.5×34.4 mm

#### Cables

Current load capacity	see derating curve
-----------------------	--------------------

#### Commercial data

country of origin	CZ
customs tariff number	85389099
EAN	4048879641562
eClass	27143424
Packaging unit	5.000