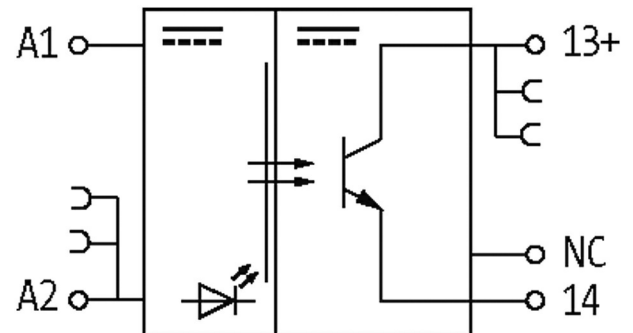



MIRO TR 24VDC SK 2A 5P OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 2 A

Transistor 2 A
24 V DC
Inrush current limiting
with solder terminal
Screw terminals

[Link to Product](#)**Illustration**

common return for NC

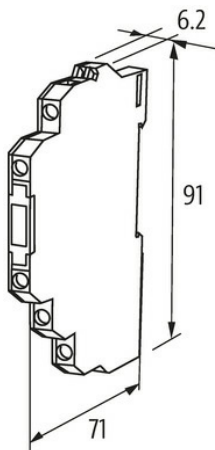

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	91×6.2×71 mm

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	5/10 ms
Saturation voltage (across output)	max. 0.35 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 10 Hz
Switching current per output	1 mA...2 A (overload protected)

Input

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879026840
eClass	27371604
Packaging unit	1.000