

**MOSA M12 MALE 0° FIELD-WIREABLE (IDC)**5-pol., 0,34-0.5mm<sup>2</sup>


Male straight

M12, 5-pole


IDC terminals

Connection cross section: 0.34...0.5 mm<sup>2</sup>

The resistance to aggressive media should be individually tested for your application. Further details on request.

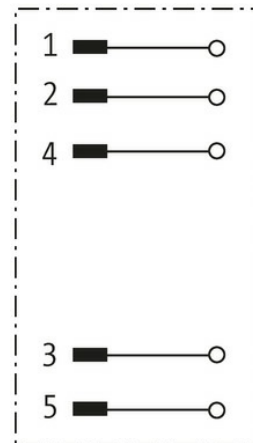[Link to Product](#)**Illustration**

Male



Product may differ from Image

**Form**

Form 12533

**Technical Data**

Operating voltage max. 50 V AC/DC

Operating current per contact max. 4 A

Connection cross section 0.34...0.5 mm<sup>2</sup> (conductor diameter min. 0.1 mm)

Sealing range (cable Ø)	4.7...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Outer wire Ø	1.2...2.0 mm

**General data**

Temperature range	-25...+85 °C
Dimensions H×W×D	52.4×20.5×20.5 mm

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879306010
eClass	27279221
Packaging unit	1.000