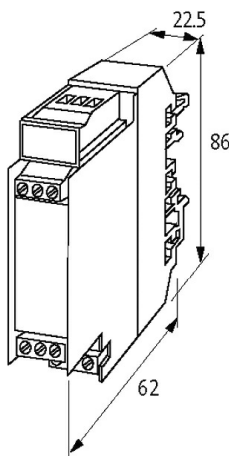
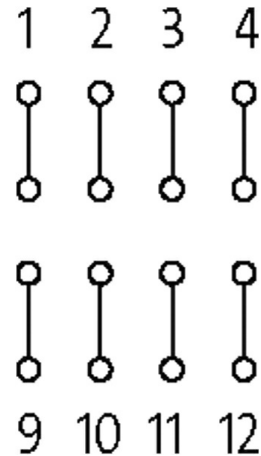


ASSEMBLY MODULE MKS - M 4

Mounting rail / screw-type terminal

4 pairs of solder pins
screw terminals connected to solder pin pairs

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current	max. 2.5 A
Distance of solder pins	30 mm

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Housing	Plastic, flame retardant. Cover removable
Connection	Screw terminals: max. 4 mm ² , pairs of solder pins (spacing 5 mm)
Dimensions H×W×D	68×22.5×65 mm

Commercial data

country of origin	CZ
customs tariff number	85369010

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

EAN	4048879041812
eClass	27379201
Packaging unit	1.000