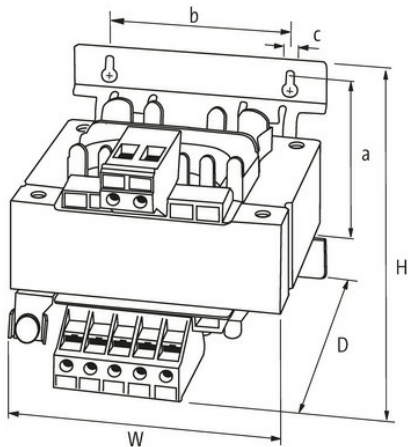
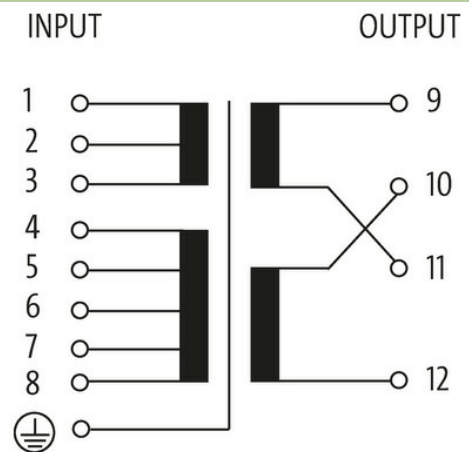


**MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER**

P: 500VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers  
 500 VA  
 Isolation class T 40/B  
 Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8x10 mm
Fixing centers a×b×c	117×104×5.8 mm

The information in this brochure has been compiled with the utmost care.  
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Dimensions H×W×D 138×135×135 mm

**Output**

Output voltage 1× 230, 1× 115, 2× 115 V AC  
Output rating 500 VA

**Input**

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC  
Inrush current 81 A (208 V AC); 31 A (550 V AC)  
Short-circuit current 68 A (208 V AC); 26 A (550 V AC)  
Input current 2.76 A (208 V AC); 1.1 A (550 V AC)  
Frequency 50...60 Hz

**Commercial data**

country of origin CZ  
customs tariff number 85043180  
EAN 4048879078740  
eClass 27031302  
Packaging unit 1.000