

M12 FEMALE 0° FIELD-WIREABLE

Female straight

M12, 4-pole

Screw terminals



Sealing range (cable Ø): 8...10 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Female

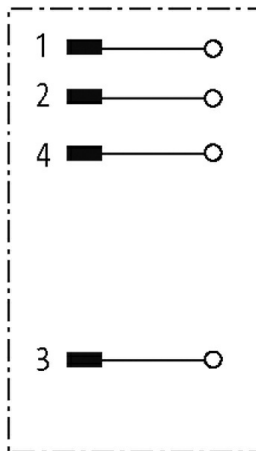

Product may differ from Image

Form

Form 12945

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 8 A
Connection cross section	max. 1.5 mm ²
Sealing range (cable Ø)	8...10 mm
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

Commercial data

country of origin DE

customs tariff number	85366990
EAN	4048879378369
eClass	27279221
Packaging unit	1