

MIRO 6.2 OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 0,1 A / 500kHz

Transistor 0.1 A



24 V DC

Switching frequency: max. 500 kHz

Spring clamp terminals

[Link to Product](#)

Illustration

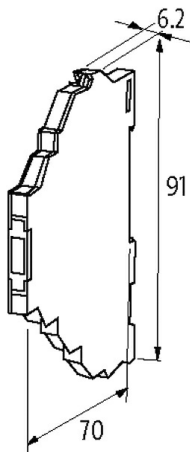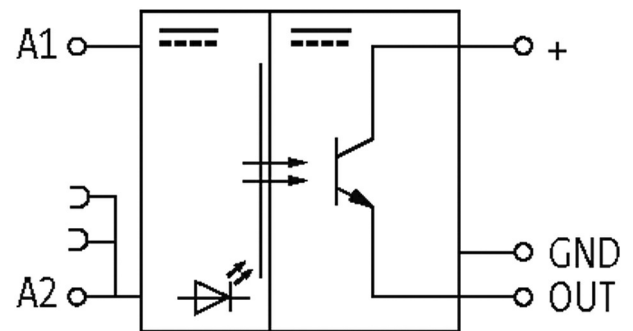

Product may differ from Image



General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions H×W×D	91×6.2×70 mm

Output

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 250 μ A
Switching time ON/OFF	0.4/0.1 μ s
Saturation voltage (across output)	max. 1.2 V AC/DC
Switching voltage	5...48 V DC
Switching frequency	500 kHz (resist.)
Switching current per output	0...0.1 A

Input

Control current	5.5 mA
Voltage range OFF	0...7 V DC
Voltage range ON	10...30 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879024372
eClass	27371604
Packaging unit	1.000