


## MIRO TR 70-130VAC/DC SK OPTO-COUPLER MODULE

IN: 130 VAC/DC - OUT: 48 VDC / 0,5 A


Transistor 0.5 A  
110 V AC/DC  
Screw terminals

### [Link to Product](#)

#### Illustration

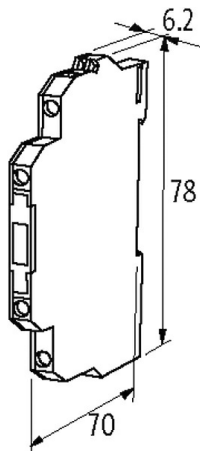

Product may differ from Image

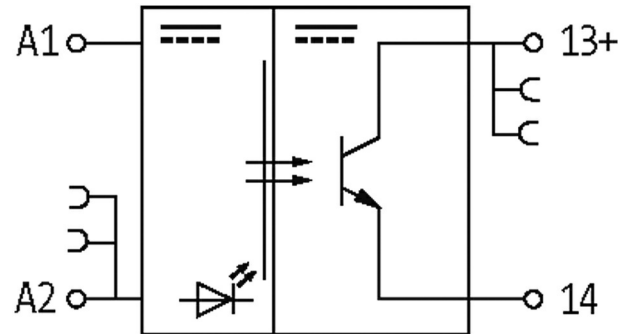

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

#### Output

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	100/700 $\mu$ s
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 500/30 Hz (resist./ind.)
Switching current per output	0.1 mA...0.5 A

**Input**

Control current	6 mA
Voltage range OFF	0...30 V AC/DC
Voltage range ON	70...130 V AC/DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879026895
eClass	27371604
Packaging unit	1.000