

SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE

230V LED+VDR M16x1.5




Form BI (11 mm)
230 V AC/DC $\pm 10\%$
LED and RC
metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

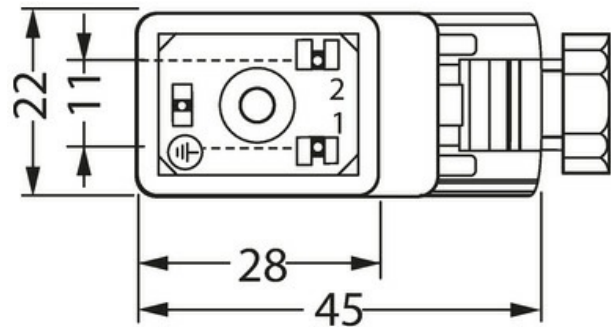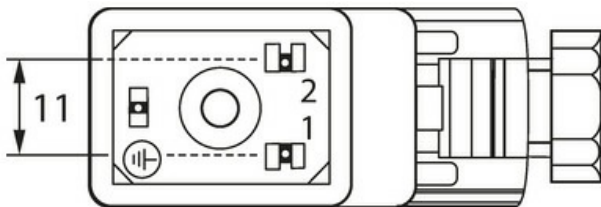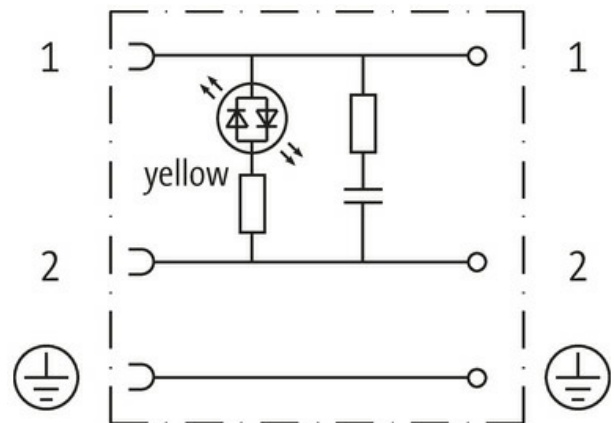

Height: 41 mm

Product may differ from Image

Form

Form 29961

Technical Data

Operating voltage	230 V AC/DC $\pm 10\%$
Current consumption	approx. 12 mA
Switch off peak	max. 450 V
LED display	(yellow)
Locking of ports	M3 (recommended torque 0.4 Nm)
Compression gland	M16x1.5 mm
Connection cross section	1.5 mm ² (with ferrule end)

Sealing range (cable Ø)	5...10 mm
Protection	IP65 inserted and tightened (EN 60529), with gland
max. power (W)	max. 50 W (VA)
Switch off delay time	max. 15 ms

General data

Temperature range	-20...+60 °C
-------------------	--------------

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879187077
eClass	27279221
Packaging unit	1.000