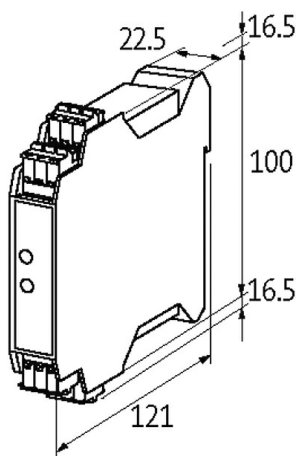
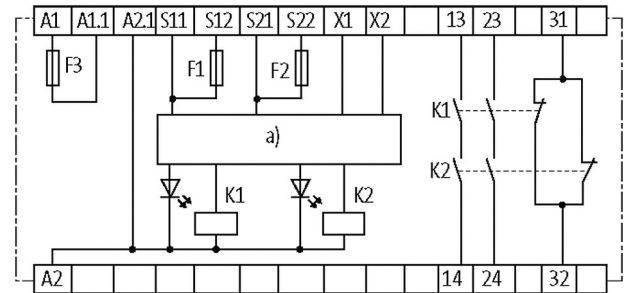


MIRO SAFE+ HAND 24

24 VDC - 2 N/O contact / 1 N/C contact

6 A

Two hand control

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C (storage temperature -40...+85 °C)
Mech./ elect. life	10 000 000 switching cycles/load dependent
Connection	Spring clamp plug-in terminals
Dimensions HxWxD	100x22.5x121 mm

Output

No. of alarm outputs	0
----------------------	---

Contact material	Ag Sn O, self cleaning, positively driven
Switching voltage	max. 250 V AC/DC
No. of safety contacts	2 - (13-14); (23-24)
No. of auxiliary contacts	1 - (31-32)
Switching current per output	max. 6 A

Input

Input voltage	24 V DC $\pm 10\%$
Input current	max. 1.2 W

Utilization category

AC-15	6 A (230 V AC) STOP0
Safety contacts (STOP 0)	max. 250 V AC/6 A; min. 10 V AC/10 mA (resist./ind.), at suitable suppression
DC-13	6 A (24 V DC) STOP0

Commercial data

country of origin	DE
customs tariff number	85364900
EAN	4048879367578
eClass	27371819
Packaging unit	1.000