

## M12-Bus terminating plug for CUBE67, F&B Pro

F&B Pro

Cube67

Terminating resistor

Male

M12, 6-pole

A-coded


Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.




The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

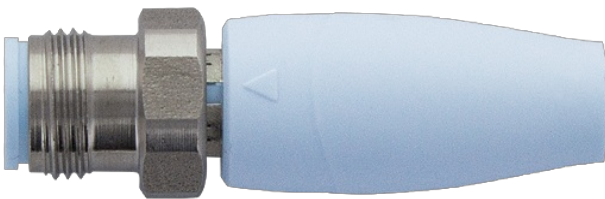

Male

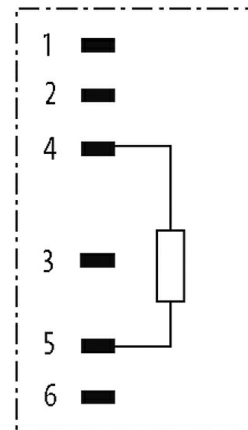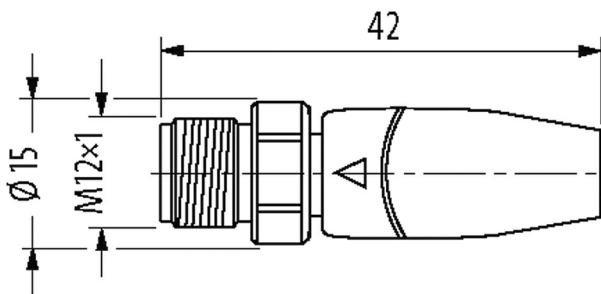

Product may differ from Image



#### Technical Data

Operating voltage	max. 30 V DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A

No. of poles	6
Material group	IEC 60664-1, category I
Coding	A-coded
LED display	no
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Compression gland	M12 (SW14)
Protection	IP65, IP68, IP69K inserted and tightened (EN 60529)
Material	PP
Locking material	Stainless steel 1.4404 (V4A)

**General data**

Mounting method	inserted, tightened
Material (contact)	Copper alloy
Material (contact surface)	Au
Pollution Degree	3
Temperature range	-40...+105 °C

**Commercial data**

country of origin	DE
customs tariff number	85332100
EAN	4048879772464
eClass	19070403
Packaging unit	1