

## T-COUPLER 5 POLEMALE./5 POLEFEMALE M12 SHIELDED

T-coupler

Male straight – females straight

M12 – M12, 5-pole

shielded




Parallel circuit

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### [Link to Product](#)

#### Illustration

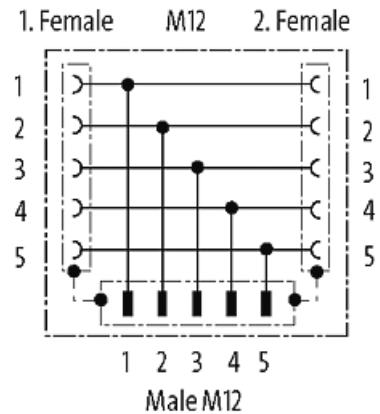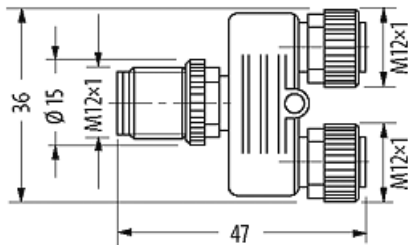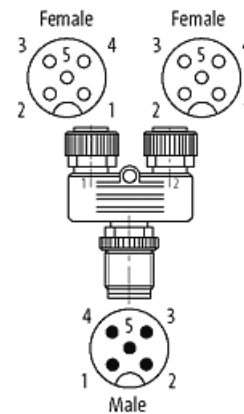

Product may differ from Image



#### Form

Form 42141

#### Technical Data

Operating voltage max. 60 V AC/DC

Operating current per contact max. 4 A

Locking of ports Screw thread (M12x1 mm) recommended torque 0.6 Nm, self-securing

Protection IP67 inserted and tightened (EN 60529)

#### General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Temperature range -25...+85 °C

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879143219
eClass	27143423
Packaging unit	1