



M12 female recept. D-cod. front

PE wires 4x0.34 0.2m


Flange female
M12, 4-pole
D-coded
Front mounting
with multi-strand wire

[Link to Product](#)


Illustration

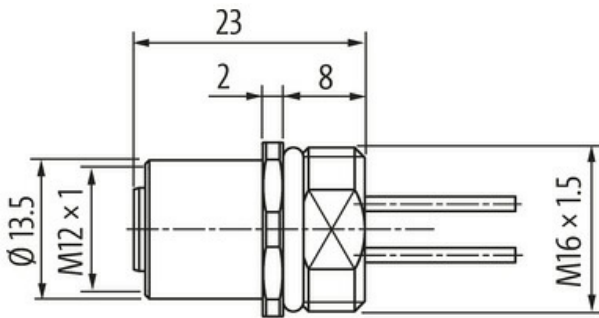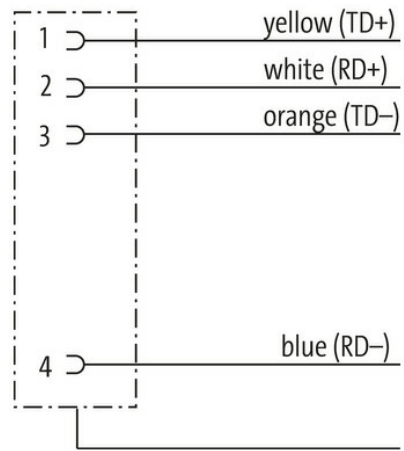

Female



Product may differ from Image



Form

Form 14501

Technical Data

Operating voltage max. 250 V AC/DC

Operating current per contact max. 4 A

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	up to 100 Mbit/s full duplex
Coding	D-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP66K, IP67 inserted and tightened (EN 60529)
Protection NEMA	3, 4, 6P (UL 50E)
Locking material	Zinc die casting, matte nickel plated

Cables

No./diameter of wires	4× 0.34 mm ²
Wire isolation	PUR (wh, ye, bl, or)
Outer Ø	1.3 mm ±5%
Cable number	976
Temperature range (fixed)	-40...+90 °C
Temperature range (mobile)	-25...+90 °C
Bend radius (fixed)	5× outer Ø

Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879197502
eClass	27279220
Packaging unit	1.000