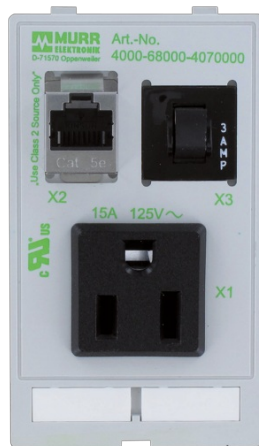


**MODLINK MSDD SINGLE COMBI INSERT USA NEMA 5-15**

1xRJ45 female/female + 1x3A fuse

1 × NEMA 1-15 (plug-solder connection)  
 1 × RJ45, 8-pole metal, CAT5e (female/female)  
 1 × fuse (3 A)

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Dimensions HxWxD 88x51x53 mm

**RJ45**

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

**Fuse**

Operating voltage	250 V AC/32 V DC
Continuous load	3 A

**USA**

Operating current	15 A
Operating voltage	125 V AC
No. of poles	2 + PE
Connection	Plug-solder connection: 4.8x0.5 mm

**Shielding plate**

Tightening torque	0.9 Nm ±0.1
Connection	Threaded hole M4

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879452762
eClass	27189217
Packaging unit	1.000