

**7/8" FEMALE 90° FIELD-WIREABLE SCREW**

5-pol. clamp section 6-8mm

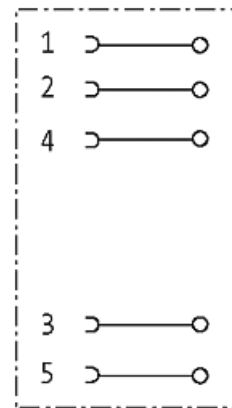
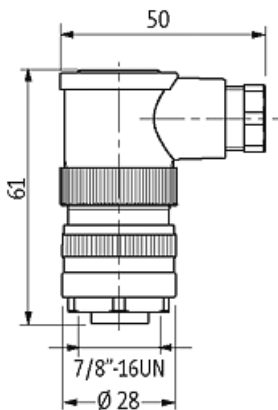
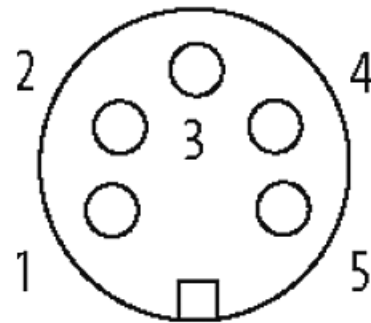
Female 90°

7/8" (5-pole)

Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration****Female**

Product may differ from Image

**Form**

Form 78261

**Technical Data**

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 9 A
Connection cross section	max. 1.5 mm <sup>2</sup>
Sealing range (cable Ø)	6...8.7 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing

Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

**General data**

Temperature range	-25...+85 °C
-------------------	--------------

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879134705
eClass	27279218
Packaging unit	1