

Mico Pro Potential distributor 2 x 2 x 06

Multiplying two channels 5-times , max 20 A each channel

Mico Pro® PD 2x 2x 06


2 channels per (x5)

Build your own Mico Pro® online:

<https://micopro.murrelektronik.com>

Link to Product

Illustration

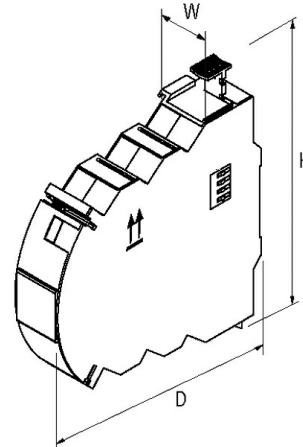

Product may differ from Image



General data

Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
Protection	IP20
Dimensions HxWxD	130x24x114 mm
Bridging concept	Bridge set (max. 40 A)

Input

Operating voltage	12 V DC; 24 V DC
Total current	max. 2x 20 A

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Cross section (flex)	0.2...2.5 mm ² (AWG 24...14)
Connection	Push-In spring clamp terminals
Cross section (rigid)	0.2...2.5 mm ² (AWG 24...14)

Commercial data

country of origin	CZ
customs tariff number	85363030
EAN	4048879749237
eClass	27141106

Packaging unit

1.000