

**RJ45 ETHERNET 0° 4POL,SHIELDED**

Ethernet CAT5

Male straight

RJ45, 4-pole

shielded

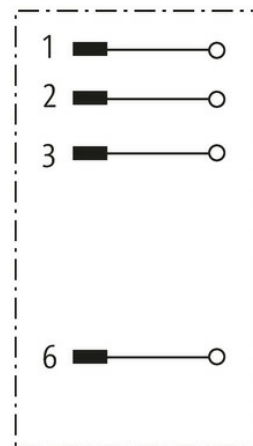
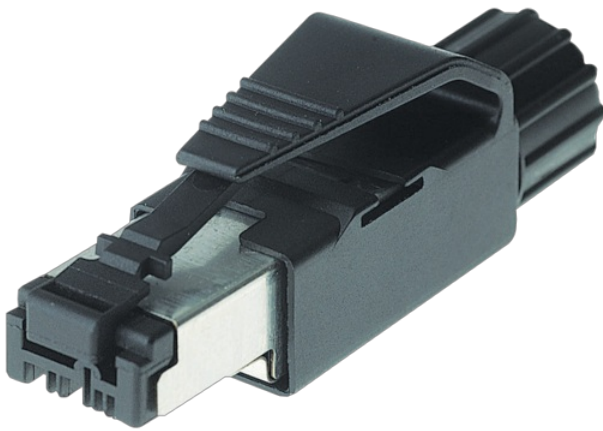
Sealing range (cable Ø): 6.5...6.9 mm

IDC terminals

Protection IP20

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

6 321



Product may differ from Image

**Form**

Form 99051

**Technical Data**

Operating voltage	max. 60 V DC
Operating current per contact	max. 2 A
Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	up to 100 Mbit/s full duplex
Connection cross section	0.25...0.34 mm <sup>2</sup> (AWG 22...24)

Sealing range (cable Ø)	6.5...6.9 mm
-------------------------	--------------

Protection	IP20
------------	------

**General data**

Temperature range	-40...+70 °C
-------------------	--------------

**Commercial data**

country of origin	RO
-------------------	----

customs tariff number	85366990
-----------------------	----------

EAN	4048879114165
-----	---------------

eClass	27061801
--------	----------

Packaging unit	1.000
----------------	-------