



MIRO TR 24VDC SK OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A
24 V DC
Screw terminals

[Link to Product](#)

Illustration

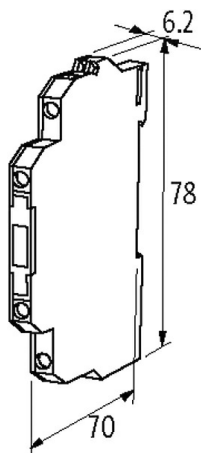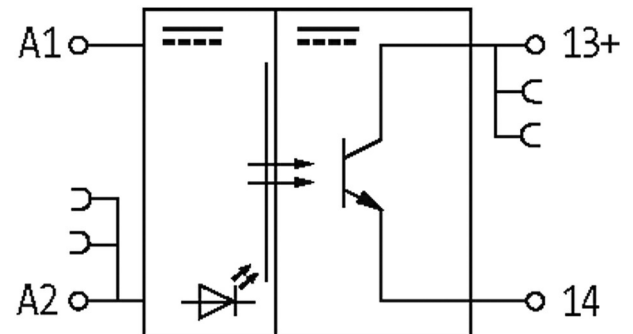

Product may differ from Image



General data

| | |
|------------------------|--------------------------------|
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -20...+60 °C |
| Test isolation voltage | 3.75 kV |
| Housing | Black plastic, flame retardant |
| Dimensions HxWxD | 78x6.2x70 mm |

Output

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|------------------------------------|---------------------------------|
| Leakage current (output is open) | max. 10 μ A |
| Switching time ON/OFF | 35/400 μ s |
| Saturation voltage (across output) | max. 1.2 V DC |
| Switching voltage | 5...48 V DC |
| Switching frequency | max. 1000/100 Hz (resist./ind.) |
| Switching current per output | 0.1 mA...0.5 A |

Input

| | |
|-------------------|--------------|
| Control current | 6 mA |
| Voltage range OFF | 0...5 V DC |
| Voltage range ON | 10...53 V DC |
| LED display | LED (yellow) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85414900 |
| EAN | 4048879026949 |
| eClass | 27371604 |
| Packaging unit | 1.000 |