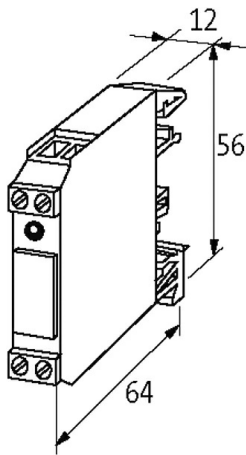
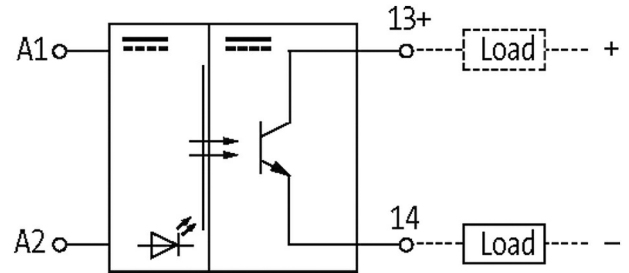


AMMS 10-44/2 A OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 40 VDC / 2 A

Transistor 2 A

24 V DC

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	56x12.5x64 mm

Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	2/8 ms
Saturation voltage (across output)	max. 0.1 V DC
Switching voltage	4.5...40 V DC
Switching frequency	max. 20/5 Hz (resist./ind.)
Switching current per output	10 mA...2 A

Input	
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (red)
Input current	6 mA

Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879028004
eClass	27371604
Packaging unit	1.000