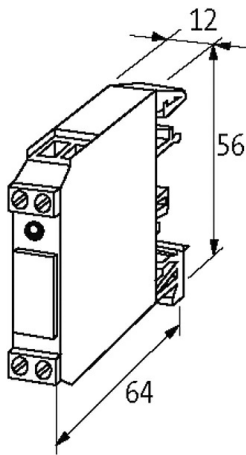
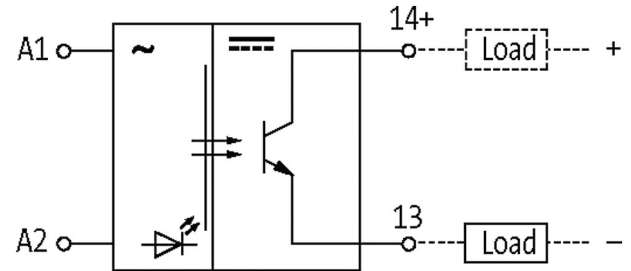


EMMS-30-64/1 OPTO-COUPLER MODULE

IN: 253 VDC - OUT: 53 VDC / 1,2 A

Transistor 1.2 A
110/230 V AC[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	56x12x64 mm

Output

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	20/50 ms
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	4.5...53 V DC
Switching frequency	max. 5 Hz
Switching current per output	1 mA...1.2 A

Input	
Voltage range OFF	0...40 V AC
Voltage range ON	100...253 V AC
LED display	LED (red)
Input current	2.7 mA
Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879027946
eClass	27371604
Packaging unit	1.000