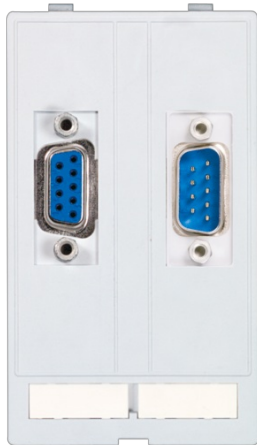


MODLINK MSDD DATA INSERT

1xSUB-D9 female/female + 1xSUB-D9 male/male

SUB-D9; SUB-D9
 1 × SUB-D9 (female/female)
 1 × SUB-D9 (male/male)

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Dimensions H×W×D	88×51×15 mm
------------------	-------------

SUB-D9

Operating current (UL Rating)	max. 175 mA
Locking of ports	UNC 4...40 bolt
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Operating current	3 A
No. of poles	9-pole
Operating voltage	48 V AC/DC

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879038058
eClass	27189217
Packaging unit	1.000