

# BMH1002T27F1A

servo motor BMH - 6 Nm - 6000 rpm -  
untapped shaft - with brake - IP65/IP67



## Main

Product or component type	Servo motor
Device short name	BMH
Maximum mechanical speed	6000 rpm
Continuous stall torque	6 N.m for LXM32.D30M2 10 A at 115 V single phase 6 N.m for LXM32.D30M2 10 A at 230 V single phase
Peak stall torque	10.3 N.m for LXM32.D30M2 10 A at 115 V single phase 18.4 N.m for LXM32.D30M2 10 A at 230 V single phase
Nominal output power	750 W for LXM32.D30M2 10 A at 115 V single phase 1450 W for LXM32.D30M2 10 A at 230 V single phase
Nominal torque	3.5 N.m for LXM32.D30M2 10 A at 115 V single phase 4.6 N.m for LXM32.D30M2 10 A at 230 V single phase
Nominal speed	2000 rpm for LXM32.D30M2 10 A at 115 V single phase 3000 rpm for LXM32.D30M2 10 A at 230 V single phase
Product compatibility	LXM32.D30M2 at 115 V single phase LXM32.D30M2 at 230 V single phase
Shaft end	Untapped
IP degree of protection	IP65 (standard) IP67 (with IP67 kit)
Speed feedback resolution	32768 points/turn x 4096 turns
Holding brake	With
Mounting support	International standard flange
Electrical connection	Straight connectors

## Complementary

Range compatibility	Lexium 32
[Us] rated supply voltage	240 V
Network number of phases	Three phase
Continuous stall current	8.65 A
Continuous power	2.39 W
Maximum current Irms	15 A for LXM32.D30M2 at 115 V 30 A for LXM32.D30M2 at 230 V
Maximum permanent current	30.24 A
Second shaft	Without second shaft end
Shaft diameter	19 mm
Shaft length	40 mm
Feedback type	Multiturn SinCos Hiperface
Holding torque	5.5 N.m (holding brake)
Motor flange size	100 mm
Number of motor stacks	2
Torque constant	0.72 N.m/A at 120 °C

Back emf constant	46.2 V/krpm at 120 °C
Number of motor poles	10
Rotor inertia	6.77 kg.cm <sup>2</sup>
Stator resistance	0.54 Ohm at 20 °C
Stator inductance	2.7 mH at 20 °C
Stator electrical time constant	5 ms at 20 °C
Maximum radial force Fr	990 N at 1000 rpm 790 N at 2000 rpm 690 N at 3000 rpm 620 N at 4000 rpm 580 N at 5000 rpm
Maximum axial force Fa	0.2 x Fr
Brake pull-in power	12 W
Type of cooling	Natural convection
Length	202.3 mm
Centring collar diameter	95 mm
Centring collar depth	3.5 mm
Number of mounting holes	4
Mounting holes diameter	9 mm
Circle diameter of the mounting holes	115 mm
Product weight	6.4 kg

### Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0936 - <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available <a href="#">Download Product Environmental</a>
Product end of life instructions	Need no specific recycling operations



115 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive

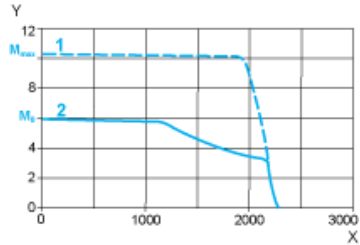


- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30M2 servo drive

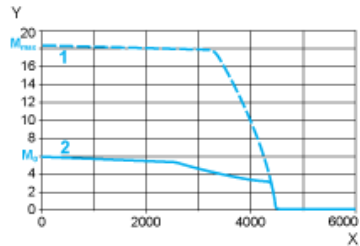

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque