

Xelity 10 TX IP67 M GE PN 4P


10 Port GE with PN
 PROFINET - Managed Switch
 M12 Power, 4-pole, L-coded
 Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)


Illustration





Female



Male



Female

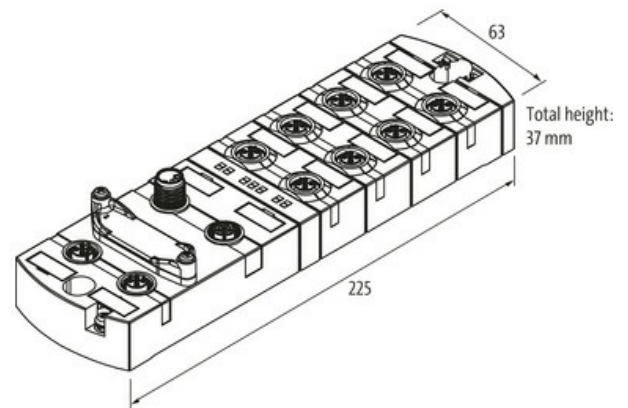

Product may differ from Image



Technical Data

Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67

Dimensions H×W×D 37×63×225 mm

Connections

Fieldbus	10× M12 (female), X-coded
Supply	2× M12 Power, 4-pole, L-coded, 2× max. 16 A

PROFINET

Specification	V2.4, Conformance Class B
Addressing	DCP
FSU (Fast-Start-Up)	no
PROFINET Netload Class	III
MRP	yes
Shared Device	no

Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	PROFINET - Managed Switch

Diagnostic

Communication status	via LED, LLDP
Monitoring - no voltage	yes

Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879866606
Packaging unit	1.000