

Xelity 8 +2 TX IP67 M GE 4P


8+2 Port FE without PN
 M12 Power, 4-pole, L-coded
 Supply PIN 1/3
 Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)


Illustration




Female




Female




Male



Female



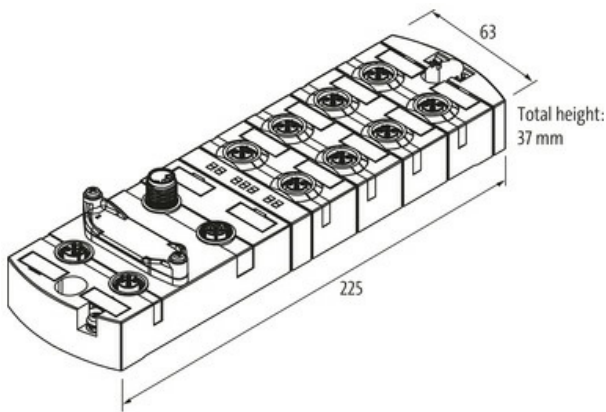

Product may differ from Image

Technical Data

Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions HxWxD	37x63x225 mm

Connections

Fieldbus	2x M12 (female), X-coded; 8x M12 (female), D-coded
Supply	2x M12 Power, 4-pole, L-coded, 2x max. 16 A

Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	Managed Switch

Diagnostic

Communication status	via LED, LLDP
Monitoring - no voltage	yes

Commercial data

country of origin	DE
customs tariff number	85176200
EAN	4048879866279
Packaging unit	1.000