

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

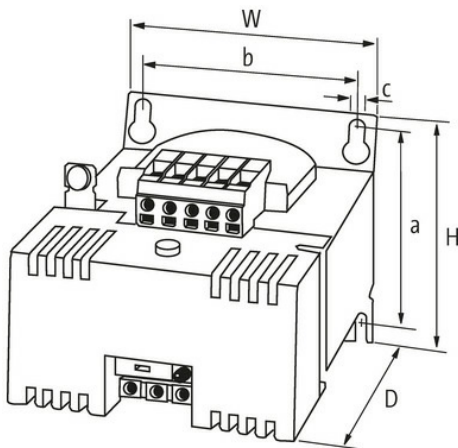
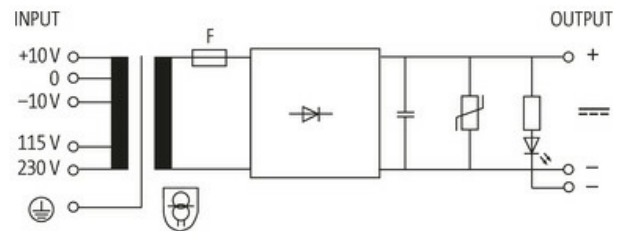
IN: 115/230+/-10VAC OUT: :24V/5ADC

Current: 5 A

Output rating: 120 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

For any mounting position at vertical wall.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	75×84×5.8 mm
Dimensions H×W×D	95×96×136 mm

Output

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 5 A (115 V AC); 6 A (230 V AC)
Output suppression	LED, VDR and smoothing capacitor
Output fuse	10 A (automotive fuse FKS)
Ripple	max. 5% eff/rms

Input

Input voltage	115/230 V AC \pm 10 V AC
Input fuse (external)	3.15 AT (115 V AC); 1.6 AT (230 V AC)
Input current	2 A (115 V AC); 1 A (230 V AC)
Frequency	50...60 Hz

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879079976
eClass	27049002
Packaging unit	1.000