

## MUIW ANALOG COUPLER COMPONENT

IN: 0..10 V - OUT: 0..20 mA

INPUT: 0...10 V DC



OUTPUT: 0...20 mA

Spring clamp terminals

Input and output galvanically separated

### [Link to Product](#)

#### Illustration

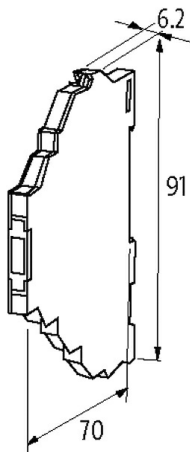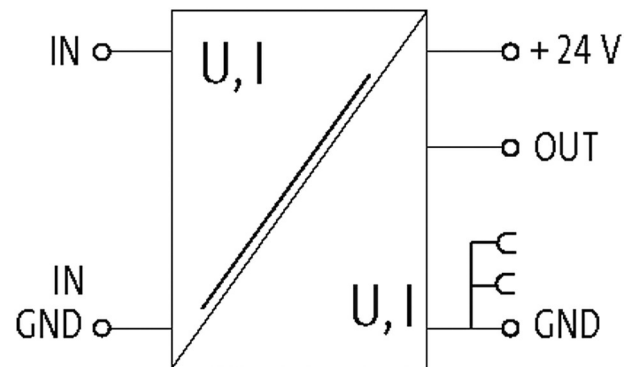

Product may differ from Image

#### Technical Data

Operating voltage	24 V DC $\pm 20\%$ , smoothed
Operating current	50...70 mA
Frequency	max. 500 Hz
Tolerance	max. 0.5%

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Test isolation voltage	1.5 kV
Dimensions H×W×D	91×6.2×70 mm

#### Description

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Functional description The Murrelektronik analog converters convert standard signal formats (0...10 V, 0...20 mA, 4...20 mA) galvanically separated into one of these signal formats. Due to an integrated current limiter the output is short-circuit and overload protected. Module

**Voltage output signals**

Load max. 25 mA

**Current outputs**

Load max. 500  $\Omega$

**Commercial data**

country of origin	CZ
customs tariff number	85437090
EAN	4048879022422
eClass	27210990
Packaging unit	1.000