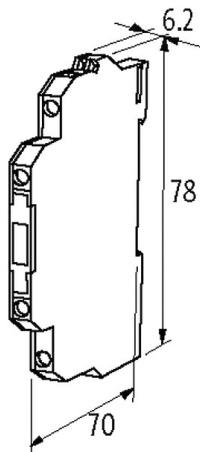
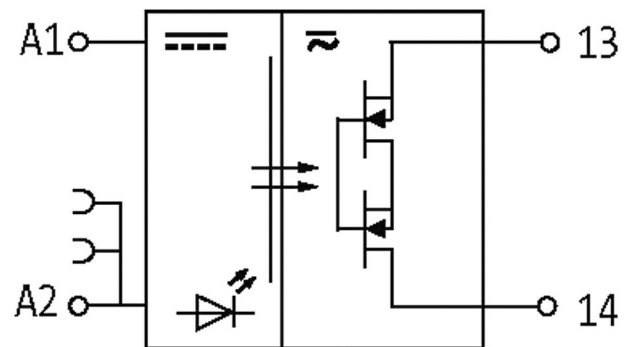


MIRO 6.2 24VDC 250VAC/DC-1A OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 350 VDC / 1 A

Transistor 1 A
24 V DC
Screw terminals
Multi voltage output

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

Leakage current (output is open)	max. 25 µA
Switching time ON/OFF	3/6 ms
Saturation voltage (across output)	max. 0.7 V AC/DC
Switching voltage	5...250 V AC/5...350 V DC

Switching frequency	max. 10 Hz
---------------------	------------

Switching current per output	1 mA...1 A
------------------------------	------------

Input

Control current	10 mA
-----------------	-------

Voltage range OFF	0...5 V DC
-------------------	------------

Voltage range ON	10...53 V DC
------------------	--------------

LED display	LED (yellow)
-------------	--------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85414900
-----------------------	----------

EAN	4048879026727
-----	---------------

eClass	27371604
--------	----------

Packaging unit	1.000
----------------	-------