

## DEMAGNETIZER 1,5 A

INPUT: 24 V DC




OUTPUT: 24 V DC

max. 1.5 A (short-circuit protected)

Screw terminals

### [Link to Product](#)

#### Illustration

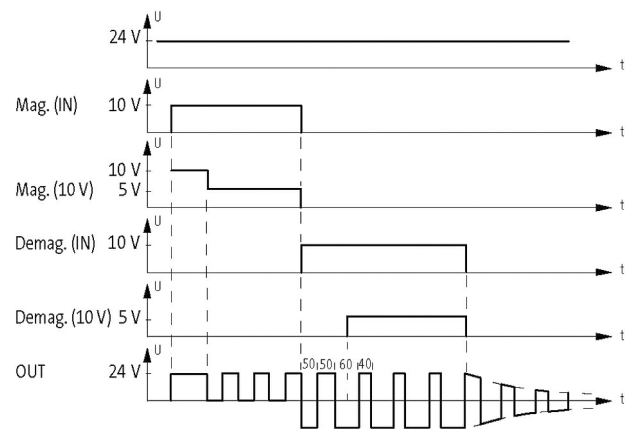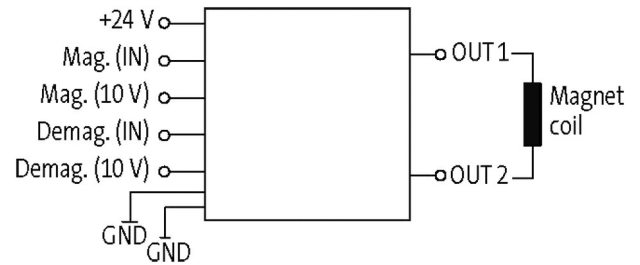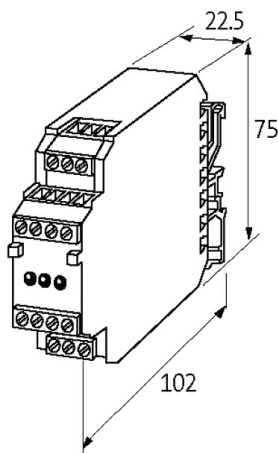

Product may differ from Image

#### Technical Data

Operating voltage	24 V DC (18...30 V DC)
Operating current	approx. 40 mA
LED display	LED (green)
Invers-polarity protection	yes

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+50 °C (storage temperature -40...+80 °C)
Protection	IP20
Connection	Screw terminals
Dimensions H×W×D	75×22.5×102 mm

#### Output

Output voltage	24 V DC
----------------	---------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

PWM frequency	approx. 800 Hz
Output current	max. 1.5 A (short-circuit protected)

**Input**

Demagnetization (analog)	0...10 V (44...55%)
Input resistor	approx. 10 k $\Omega$
Magnetization (digital)	safe OFF: max. 1V; safe ON: min. 5V (LED yellow)
Magnetization (analog)	0.8...8.8 V (0...100%)
Demagnetization (digital)	safe OFF: max. 1V; safe ON: min. 5V (LED yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85437090
EAN	4048879025058
eClass	27210990
Packaging unit	1.000