

Modlight Illumix Slim Line 4W


LED machine lamp, IP54, 24VDC, M8 connection

Modlight Illumix Slim Line

4 W


Link to Product

Illustration

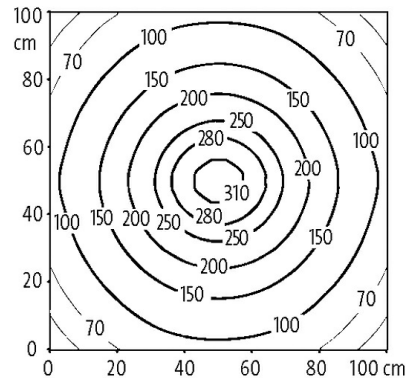


Light mounting: 50 cm

Em: 146 lx Emax: 328 lx Emin: 50 lx

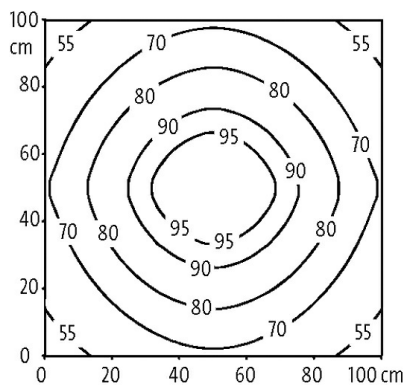

Light mounting: 100 cm

Em: 77 lx Emax: 102 lx Emin: 50 lx

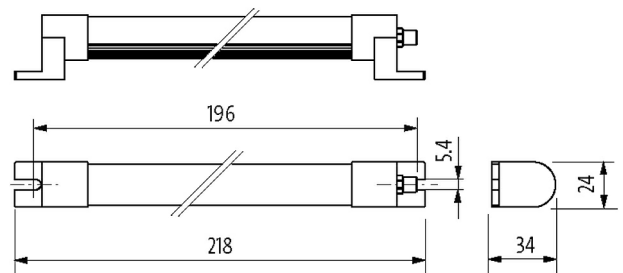

Product may differ from Image



Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M8 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 420 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K

Lighting angle	> 120°
Input current	4 W

General data

Mounting method	rotatable
Temperature range	-30...+50 °C
Material (housing)	Anodized aluminum
Material (light cover)	Diffuse polystyrene (PS)
Installation altitude	Operation up to 2 000 m
Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
Screw head-Ø	max. 12 mm/M5
Relative humidity	5...95%
Protection	IP54
Dimensions H×W×D	34×218×24 mm (1.34×8.58×0.94 in)
Shock load	50 g, 11 ms

Commercial data

country of origin	DE
customs tariff number	94054231
EAN	4048879670739
eClass	27110306
Packaging unit	1.000