

MOSA VALVE PLUG FORM A 18MM FIELD-WIREABLE

Form A (18 mm)

0...250 V AC/300 V DC

without components




IDC terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

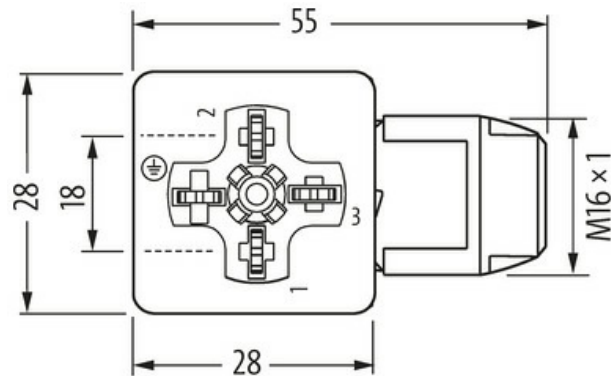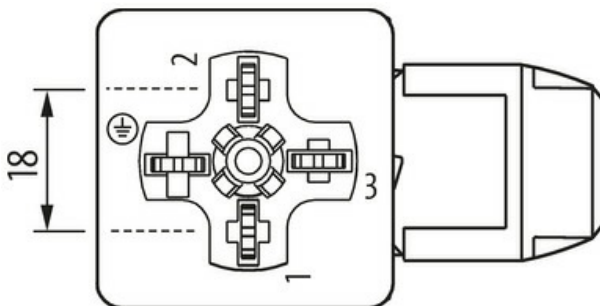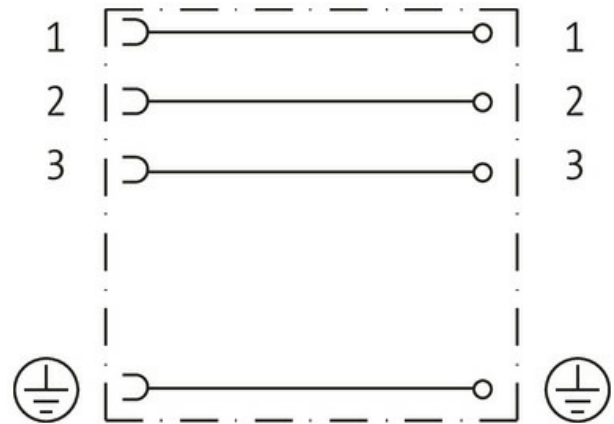

Height: 40 mm

Product may differ from Image



Form

Form 18161

Technical Data

| | |
|-------------------------------|--|
| Operating voltage | 0...250 V AC/300 V DC |
| Operating current per contact | max. 6 A |
| Connection cross section | 0.5...1.0 mm ² (conductor diameter min. 0.1 mm) |
| Sealing range (cable Ø) | 5.5...8 mm |

| | |
|------------|--|
| Protection | IP67 inserted and tightened (EN 60529) |
|------------|--|

| | |
|--------------|--------------|
| Outer wire Ø | 1.6...2.0 mm |
|--------------|--------------|

General data

| | |
|-------------------|--------------|
| Temperature range | -25...+85 °C |
|-------------------|--------------|

| | |
|--------------|----------|
| Mounting set | M16×1 mm |
|--------------|----------|

| | |
|------------------|-------------|
| Dimensions H×W×D | 40×28×55 mm |
|------------------|-------------|

Commercial data

| | |
|-------------------|----|
| country of origin | CZ |
|-------------------|----|

| | |
|-----------------------|----------|
| customs tariff number | 85366990 |
|-----------------------|----------|

| | |
|-----|---------------|
| EAN | 4048879189651 |
|-----|---------------|

| | |
|--------|----------|
| eClass | 27279221 |
|--------|----------|

| | |
|----------------|-------|
| Packaging unit | 1.000 |
|----------------|-------|