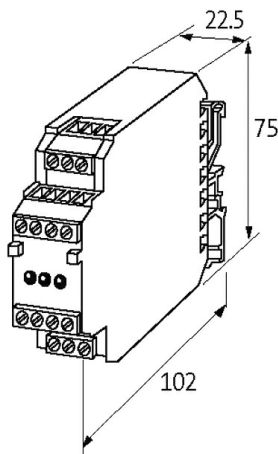
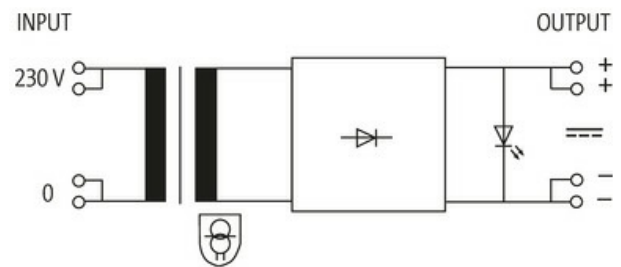


MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

IN: 230VAC OUT: 24V/0,07ADC

INPUT: 230 V AC
 OUTPUT: 24 V DC
 Current: 70 mA

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Standards	EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+60 °C, no condensation

Output

LED display	LED (green): in operation
Output suppression	VDR and smoothing capacitor
Output current	max. 70 mA
Ripple	max. 10 mV ss/pp
Unit protection	short-circuit and overload protected

Input

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Input voltage	207...253 V AC
Input fuse (external)	63 mA (T)
Input current	approx. 10 mA
Frequency	50...60 Hz

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879079662
eClass	27049002
Packaging unit	1.000