

A3 male 3-pole, Push-in, 400 V, 10 A

A3

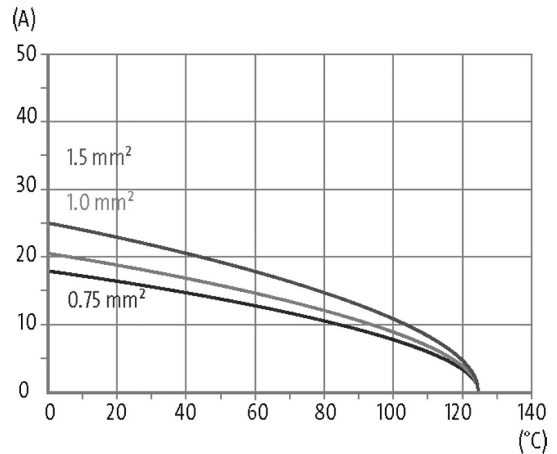
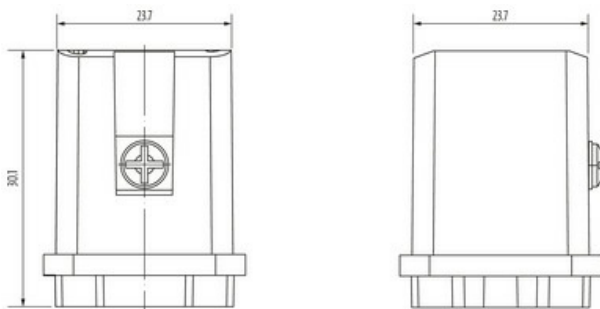
Male

3-pole

Push-In terminals

Technical data will be only guaranteed with Murrelektronik components.

Please use wire end ferrule.

Link to Product**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	400 V AC/DC (PIN - PIN); 230 V AC/DC (PIN - PE)
Rated surge voltage	4.0 kV
Operating current	10 A
No. of poles	3 + PE
Mating cycles	min. 500
Connection	Push-In terminals
Connection cross section	0.14...1.5 mm ²
Stripping length	10 mm
Over voltage category	III

General data

Material (contact surface)	Ag
Pollution Degree	3
Temperature range	-40...+125 °C
Material (contact carrier)	PC
Flammability class	V-0 (acc. to UL 94)
Size	A3
Type	Male
Climatic category	40/125/21
Dimensions H×W×D	30.1×23.7×23.7mm

Cables

Current load capacity see derating curve

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Commercial data

country of origin	CN
customs tariff number	85366990
EAN	4048879764193
eClass	27143424
Packaging unit	1.000