

## DRIVE CLIQ CABLE

Specification: 6FX8002-2DC10-1BC0

DRIVE-CLiQ signal cable for SINAMICS S120 and motors with DC 24 V wires  
Male straight – male straight

Further cable lengths on request.

The resistance to aggressive media should be individually tested for your application. Further details on request.

### Link to Product



#### Illustration



Male



Male

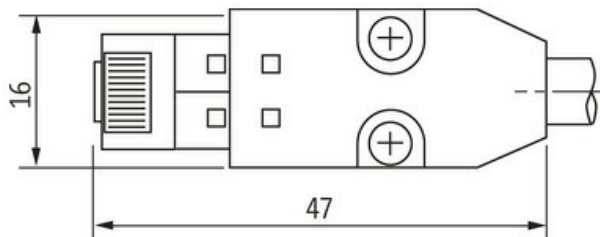

Product may differ from Image

#### Form

Form SS051

#### Technical Data

Operating voltage	max. 30 V AC/DC
Rated surge voltage	0.5 kV
Operating current	max. 1.76 A
Material group	IEC 60664-1, category II
Locking of ports	DRIVE-CLiQ-System
Protection	IP20/IP67

#### General data

Mounting method	pluggable
Pollution Degree	3
Temperature range	-20...+80 °C, depending on cable quality

#### Cables

No./diameter of wires	2 × 2 × 0.20 + 1 × 2 × 0.38
Wire isolation	PO (gnye, pkbl, rdbk)
C-track properties	5 Mio.
Outer Ø	6.9 mm ±5%

Cable number	880
Shield	yes
optical shield cover	min. 85%
Material (jacket)	PUR
Jacket Color	green
Temperature range (fixed)	-20...+80 °C
Temperature range (mobile)	-20...+60 °C
Bend radius (moving)	10× outer Ø
Torsion stress	±30°/m
Material (jacket)	PUR (UL/CSA)

**Commercial data**

country of origin	DE
customs tariff number	85444210
EAN	4048879523875
eClass	27061801
Packaging unit	1.000