

## Cable connector for cable diameters 3.5-6 mm

wires 0.14-0.34 mm<sup>2</sup>

Sealing range (cable Ø)


3.5...6 mm

conductor

0.14 ... 0.25 mm<sup>2</sup>; 0.14 ... 0.34 mm<sup>2</sup> (flex)

### Link to Product

#### Illustration

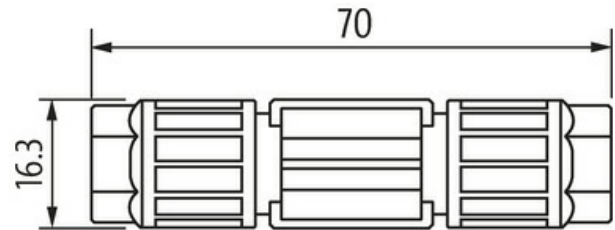

Product may differ from Image



#### Form

Form 99331

#### Technical Data

Operating voltage	max. 125 V
Rated surge voltage	2.5 kV
Operating current per contact	max. 5 A
No. of poles	4
LED display	no
Connection	Insulation displacement technology IDC
Connection cross section	0.14 ... 0.25 mm <sup>2</sup> ; 0.14 ... 0.34 mm <sup>2</sup> (flex)
Sealing range (cable Ø)	3.5...6 mm
Protection	IP65, IP67 mounted and tightened
Material	PA
Reconnection (cable)	max. 10
Tightening torque (cable compression gland)	0.8 Nm
Wire isolation	0.7...1.6 mm

#### General data

Pollution Degree	3
Temperature range	-40...+80 °C

#### Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879872553
eClass	27279220
Packaging unit	1.000