

BMH1902P21A2A

servo motor BMH - 48 Nm - 4000 rpm -
untapped shaft - without brake- IP65/IP67





Main

Product or component type	Servo motor
Device short name	BMH
Maximum mechanical speed	4000 rpm
Continuous stall torque	37.4 N.m for LXM32.D72N4 24 A at 400 V three phase 37.4 N.m for LXM32.D72N4 24 A at 480 V three phase 48 N.m for LXM32MD85N4 32 A at 400 V three phase 48 N.m for LXM32MD85N4 32 A at 480 V three phase 48 N.m for LXM32MC10N4 40 A at 400 V three phase 48 N.m for LXM32MC10N4 40 A at 480 V three phase
Peak stall torque	101 N.m for LXM32.D72N4 24 A at 400 V three phase 101 N.m for LXM32.D72N4 24 A at 480 V three phase 115.5 N.m for LXM32MD85N4 32 A at 400 V three phase 115.5 N.m for LXM32MD85N4 32 A at 480 V three phase 130.7 N.m for LXM32MC10N4 40 A at 400 V three phase 130.7 N.m for LXM32MC10N4 40 A at 480 V three phase
Nominal output power	5900 W for LXM32.D72N4 24 A at 400 V three phase 5900 W for LXM32.D72N4 24 A at 480 V three phase 6070 W for LXM32MD85N4 32 A at 400 V three phase 6070 W for LXM32MD85N4 32 A at 480 V three phase 6070 W for LXM32MC10N4 40 A at 400 V three phase 6070 W for LXM32MC10N4 40 A at 480 V three phase
Nominal torque	22.3 N.m for LXM32.D72N4 24 A at 400 V three phase 22.3 N.m for LXM32.D72N4 24 A at 480 V three phase 29 N.m for LXM32MD85N4 32 A at 400 V three phase 29 N.m for LXM32MD85N4 32 A at 480 V three phase 29 N.m for LXM32MC10N4 40 A at 400 V three phase 29 N.m for LXM32MC10N4 40 A at 480 V three phase
Nominal speed	2000 rpm for LXM32MC10N4 40 A at 400 V three phase 2000 rpm for LXM32MC10N4 40 A at 480 V three phase 2500 rpm for LXM32.D72N4 24 A at 400 V three phase 2500 rpm for LXM32.D72N4 24 A at 480 V three phase 2000 rpm for LXM32MD85N4 32 A at 400 V three phase 2000 rpm for LXM32MD85N4 32 A at 480 V three phase
Product compatibility	LXM32.D72N4 at 400...480 V three phase
Shaft end	Untapped
IP degree of protection	IP65 (standard) IP67 (with IP67 kit)
Speed feedback resolution	131072 points/turn

Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

Complementary

Range compatibility	Lexium 32
[Us] rated supply voltage	480 V
Network number of phases	Three phase
Continuous stall current	30.8 A
Continuous power	6.1 W
Maximum current I _{rms}	72 A for LXM32.D72N4
Maximum permanent current	114 A
Second shaft	Without second shaft end
Shaft diameter	38 mm
Shaft length	80 mm
Feedback type	Single turn SinCos Hiperface
Motor flange size	190 mm
Number of motor stacks	2
Torque constant	1.56 N.m/A at 120 °C
Back emf constant	108.3 V/krpm at 120 °C
Number of motor poles	10
Rotor inertia	130.1 kg.cm ²
Stator resistance	0.15 Ohm at 20 °C
Stator inductance	3.86 mH at 20 °C
Stator electrical time constant	25.7 ms at 20 °C
Maximum radial force Fr	4200 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	250 mm
Centring collar diameter	180 mm
Centring collar depth	4 mm
Number of mounting holes	4
Mounting holes diameter	14 mm
Circle diameter of the mounting holes	215 mm
Product weight	31 kg


Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1101 - Schneider Electric declaration of conformity
REACh	Reference not containing SVHC above the threshold
Product environmental profile	Available Download Product Environmental
Product end of life instructions	Need no specific recycling operations

Torque/Speed Curves

400 V 3-Phase Supply Voltage


Servo motor with LXM32-D72N4 servo drive

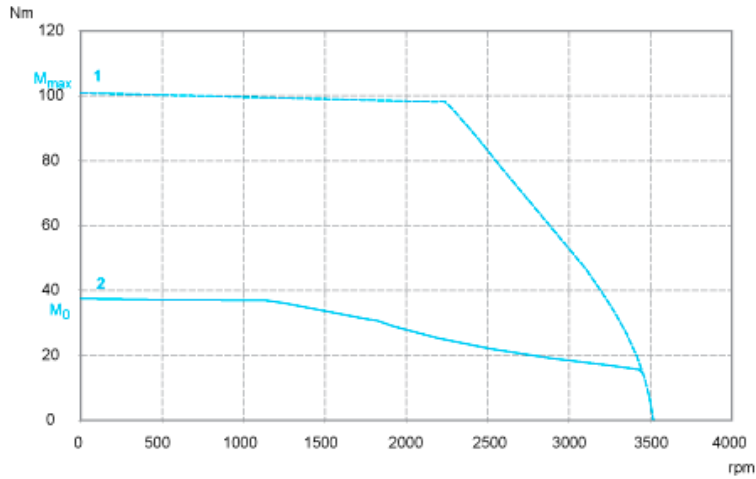

- (1) Peak torque
- (2) Continuous torque

480 V 3-Phase Supply Voltage

Servo motor with LXM32-D72N4 servo drive

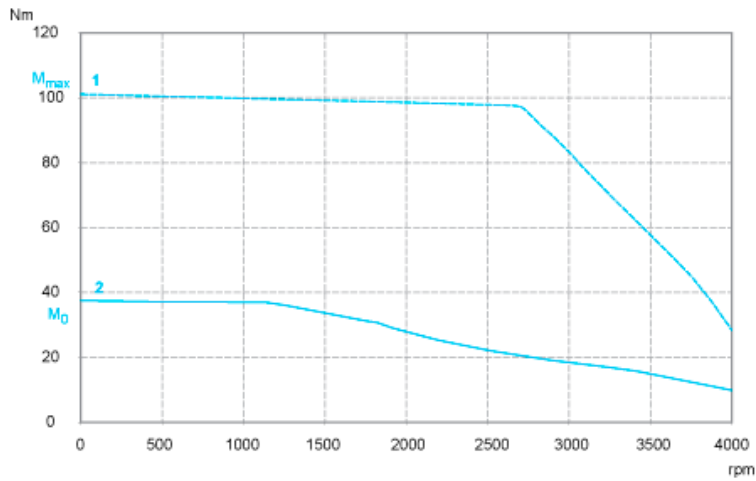

- (1) Peak torque
- (2) Continuous torque